
ANPx341/NUM

closed loop, bearing based, linear, horizontal stepper positioner with optoelectronic encoder

Technical Specifications

Technology		Compatibility with Electronics				
travel mechanism	inertial piezo drive	ANC350 piezo positioning control	.ler	ANC350/NUM		
Size and Dimensions		Working Conditions				
footprint; height	44 x 45; 11.5 mm	mounting orientation		axis horizonta	l	
maximum size	40 x 53.3; 11.5 mm	magnetic field range		07T		
weight	83 g	temperature range (/RT, /HV, /UHV) max. bake out temperature (/UHV)		0100 °C		
				150 °C		
Coarse Positioning Mode	@ 300 K	minimum pressure (/RT)		1E-4 mbar		
input voltage range	060V	minimum pressure (/HV)		1E-8 mbar		
typical actuator capacitance	1.55 μF	minimum pressure (/UHV)		5E-11 mbar		
travel range (step mode)	20 mm					
typical minimum step size	100 nm	Position Encoder				
maximum drive velocity	≈ 3 mm/s	readout mechanism		optoelectronic	sensor	
		sensor power (when measuring)		300 mW		
Fine Positioning Mode	@ 300 K	encoded travel range		full travel		
input voltage range	0100 V	wavelength of illumination		870 nm		
fine positiong range	07.5 μm	sensor resolution		10 nm		
fine positioning resolution	sub-nm	repeatability		50 nm		
		linearity (over full travel)		< 0.01 %		
Materials		absolute accuracy	solute accuracy < 0.01 % of travel range		avel range	
positioner body	titanium					
actuator	PZT ceramics	Connectors and Feedthroughs	/RT Versions		all /HV, /UHV Versions	
connecting wires	insulated twisted pair, copper	connector type	14-pole conn	ector	15-pin D-Sub connector	
bearings	ceramics	electrical feedthrough solution			VFT/HV, VFT/UHV	
Load (@ ambient conditions)	mounting orientation: axis horizontal	High Load Option (/HL)		mounting orie	nounting orientation: axis vertical	
maximum load	20 N (2 kg)	/HL/RT - ambient conditions		3 N		
maximum dynamic force along the axis	2 N	/HL/UHV - UHV conditions		2 N		
Mounting		Article Numbers /HL Option				
from the top	4 through holes dia 2.2 mm, cntrbr. f. M2	/HL/RT Version		1008365		
from the bottom	4 threads M2.5 x 2 mm	/HL/HV Version		1008364		
load on top	10 threads M 2 x 3 mm	/HL/UHV Version		1008363		
Article Numbers						
/RT Version	1005604					
/HV Version	1005605					
/UHV Version	1005606					

Technical Drawings

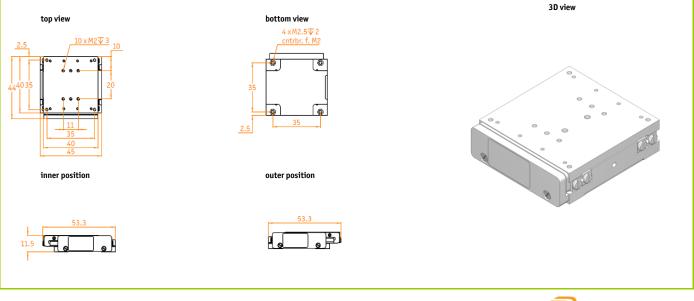



All rights, including rights created by patent grant or registration of a utility model or design as well as rights of technical modifications are reserved. Delivery subject to availability. Designations may be trademarks, the use of which by third parties for their own purposes may violate the rights of the trademark owners. © attocube systems AG 2001-2013. Issued 2013/10